

SEA-BIRD ELECTRONICS, INC.

1808 136th Place N.E., Bellevue, Washington, 98005 USA

Phone: (425) 643 - 9866 Fax (425) 643 - 9954 Email: seabird@seabird.com

SENSOR SERIAL NUMBER: 0092
 CALIBRATION DATE: 26-Jan-07p

SBE 43F OXYGEN CALIBRATION DATA

COEFFICIENTS

Soc = 2.3736e-004
 Boc = 0.0000
 Foffset = -837.0720

TCor = -0.0002
 PCor = 1.350e-04

BATH OX (ml/l)	BATH TEMP ITS-90	BATH SAL PSU	INSTRUMENT OUTPUT(Hz)	INSTRUMENT OXYGEN(ml/l)	RESIDUAL (ml/l)
1.20	2.00	0.00	1358.792	1.20	0.00
1.25	6.00	0.00	1442.365	1.25	0.00
1.32	12.00	0.01	1575.894	1.32	-0.00
1.33	20.00	0.01	1723.968	1.33	-0.00
1.35	26.00	0.01	1848.177	1.35	0.00
1.37	30.00	0.01	1941.016	1.37	0.00
4.09	2.00	0.00	2620.293	4.09	0.00
4.14	26.00	0.01	3932.325	4.14	-0.00
4.14	20.00	0.01	3590.884	4.13	-0.01
4.16	6.00	0.00	2854.110	4.16	0.00
4.16	12.00	0.01	3170.153	4.16	0.00
4.16	30.00	0.01	4192.123	4.18	0.01
6.63	30.00	0.01	6166.213	6.63	0.00
6.70	6.00	0.00	4085.878	6.70	0.00
6.74	2.00	0.00	3774.034	6.74	-0.00
6.74	12.00	0.01	4617.815	6.74	0.00
6.75	20.00	0.01	5331.088	6.75	-0.01
6.87	26.00	0.01	5973.640	6.87	-0.00

$$\text{oxygen (ml/l)} = (\text{Soc} * (\text{F} + \text{Foffset})) * \exp(\text{Tcor} * \text{T}) * \text{Oxsat}(\text{T}, \text{S}) * \exp(\text{Pcor} * \text{P})$$


F = frequency output from SBE43F, T = temperature [deg C], S = salinity [PSU]

Oxsat(T,S) = oxygen saturation [ml/l], P = pressure [dbar]

Residual = instrument oxygen - bath oxygen

Date, Delta Ox (ml/l)

● 26-Jan-07p -0.00

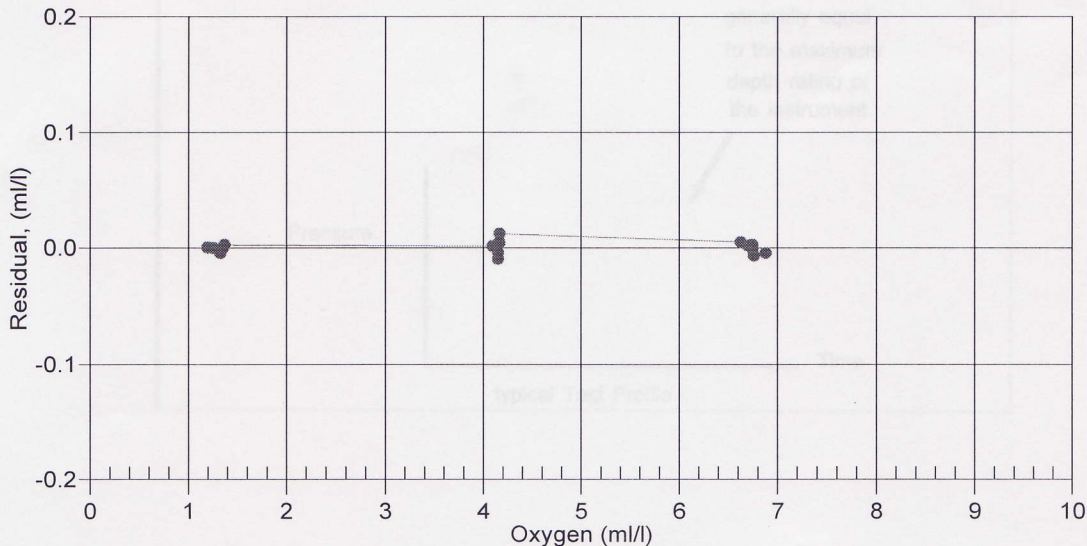



Sea-Bird Electronics, Inc.

1808 136th Place NE, Bellevue, Washington 98005 USA

Website: http://www.seabird.com

Phone: (425) 643-9866

FAX: (425) 643-9954

Email: seabird@seabird.com

SBE Pressure Test Certificate

Test Date: 1/25/2007 Description SBE-43F DO Sensor

Job Number: 44978 Customer Name UW/OCEAN

SBE Sensor Information:

Model Number: 43F

Serial Number: 0092

Pressure Sensor Information:

Sensor Type: None

Sensor Serial Number: None

Sensor Rating: 0

Pressure Test Protocol:

Low Pressure Test: 50 PSI Held For 15 Minutes

High Pressure Test: 800 PSI Held For 30 Minutes

Passed Test:

Tested By: GW

